

Evaluation of $1s2l2l'$ $^4P/{}^2P$, ${}^2P_+/{}^2P_-$, ${}^2D/{}^2P$ ratios from collisions of mixed state ($1s^2\ ^1S$, $1s2s\ ^3S$) He-like ion beams with H_2 and He targets

E. P. Benis¹, I. Madesis^{2,3} and T. J. M. Zouros^{2,3}

⁽¹⁾Department of Physics, University of Ioannina, P.O. Box 1186, Ioannina GR-45110, Greece

⁽²⁾Department of Physics, University of Crete, P.O. Box 2208, Herakleion GR-71003, Greece

⁽³⁾Tandem Lab, INPP, NCSR Demokritos, P.O. Box 60228, Aghia Paraskevi GR-15310, Greece

Abstract

New results are presented on the ratio R of ${}^4P/{}^2P$ populations of Li-like $1s2s2p$ quartet and doublet P states formed in energetic ion-atom collisions by single $2p$ electron transfer to the metastable $1s2s\ ^3S$ component of a He-like ion beam. Using spin statistics, a value of $R=2$ is predicted, mostly in disagreement with reported measurements of $R=3-10$ [1-2]. A new technique is used in the evaluation of R which overcomes the need for the normalization of the measured cross sections and allows for the determination of the separate contributions of ground- and metastable-state beam components to the measured spectra. Applying to older spectra from 4.5 MeV B^{3+} [3] and 25.3 MeV F^{7+} [4] mixed state ($1s^2\ ^1S$, $1s2s\ ^3S$) ion collisions with H_2 target, we report values of $R=3.5\pm 0.4$ for boron and $R=1.8\pm 0.3$ for fluorine. In addition, also reported for the first time are the ratios of ${}^2D/{}^2P$ and ${}^2P_+/{}^2P_-$ populations generated by either capture and/or Transfer Excitation mechanisms, providing essential information on the active processes that can affect the overall intensities of the measured Auger spectra. They are evaluated applying the same technique and compared to previously reported results for carbon collisions on He [1].

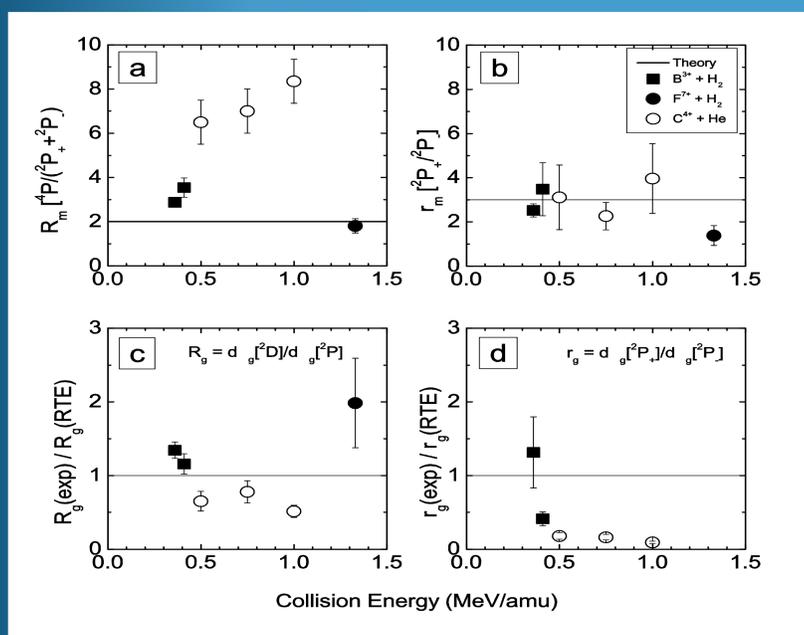


Fig. 1: Measured capture ratios along with the experimental results from applying the technique.

Motivation

The use of pre-excited long-lived $1s2s\ ^3S$ states has been particularly attractive to Zero-degree Auger electron Projectile Spectroscopy (ZAPS) technique since they can provide a unique and simple excited atomic system for testing atomic theory models as in Electron Transfer (T), Resonant (RTE) and Non-resonant (NTE) Transfer Excitation, among others. Mixed state ($1s^2\ ^1S$, $1s2s\ ^3S$) ion beams, provided by heavy ion accelerators and highly charged ion sources, have been used in such experiments, however, the fraction of the 3S over the total mixed beam is necessary information.

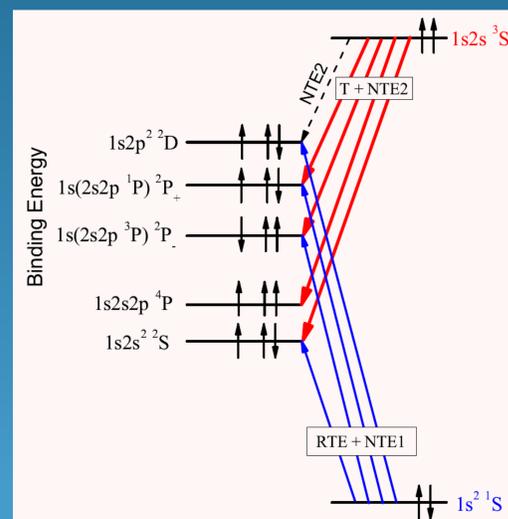


Fig. 2. Energy level diagram showing the dominant mechanisms for the production of the $1s2l2l'$ ($2S+1)L$ doubly excited states formed in collisions of energetic He-like mixed beams with H_2 targets. Single $2p$ or $2s$ electron transfer or NTE2 to the metastable state (m) in red, RTE and NTE1 from the ground state (g) in blue.

Furthermore, in the ZAPS technique the long lifetime of the 4P states should be considered. Compared to the 2P and 2D whose lifetime is short, from which electrons are emitted promptly after the formation of these states inside the gas cell, the 4P Auger electrons are emitted all along the path of the ions towards the spectrometer. This problem has been treated recently by calculating G_r - a solid angle correction factor - with the use of Monte Carlo simulation and the well known SIMION program[5].

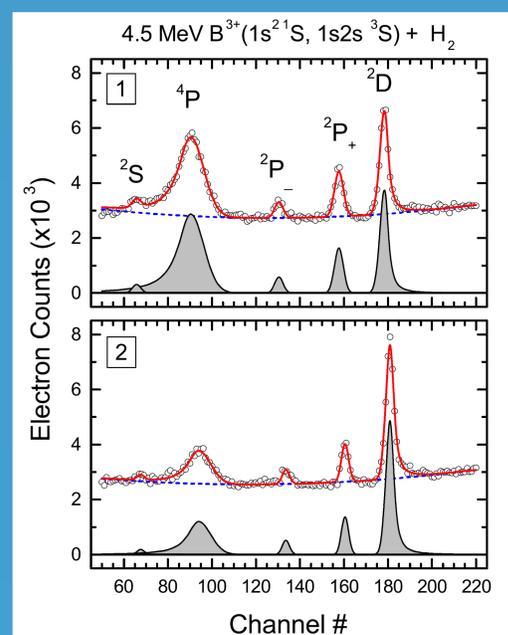


Fig. 3: Li-like $1s2l2l'$ for $l,l'=0,1$ Auger electron spectra from 4.5 MeV $B^{3+}(1s^2\ ^1S, 1s2s\ ^3S)$ collisions with H_2 . The B^{3+} beam was produced: [1] after post-stripping the incident B^{2+} beam in thin carbon foils, [2] after post-stripping the incident B^{2+} beam in Ar gas. The smaller ratio of 4P to 2D yields in spectrum [2] implies $f^{2}{}^3S < f^{1}{}^3S$. The five peaks have been least square fitted on top of a baseline quadratic background.

Here, a new approach is reported for the evaluation of R , which involves the use of two independent measurements that differ only in the fraction of the $1s2s\ ^3S$ metastable part of the ion beam, eliminating the need of pure ground state beam, the need of detection solid-angle correction factors, and the common normalization factors typically needed.

REFERENCES

- [1] D. Strohschein *et al.*, Phys. Rev. A **77** 022706 (2008).
- [2] T. J. M. Zouros *et al.*, Phys. Rev. A **77**, 050701R (2008).
- [3] E. P. Benis *et al.*, Phys. Rev. A **65**, 064701 (2002).
- [4] M. Zamkov *et al.*, Phys. Rev. A **65**, 062706 (2002).
- [5] S. Doukas *et al.*, Rev. Sci. Instrum. **86**, 043111 (2015)